

Uniclass L7522	EPIC L22
CI/SfB (56.84)	X

**Lot 20  
compliant**



Wireless Heating Systems

**SPACE SAVING RADIANT PANEL  
BRUSHED STAINLESS STEEL OR MIRROR FINISH**  
with Wireless Time and Temperature Control




*All local space heaters manufactured for sale in the EU after 1st January 2018 which use electricity, gaseous or liquid fuels, must comply with a minimum efficiency standard. This includes electric radiators, electric underfloor heating and electric and gas fires.*

 **PROUDLY MANUFACTURED IN THE UK**



BRUSHED STAINLESS STEEL

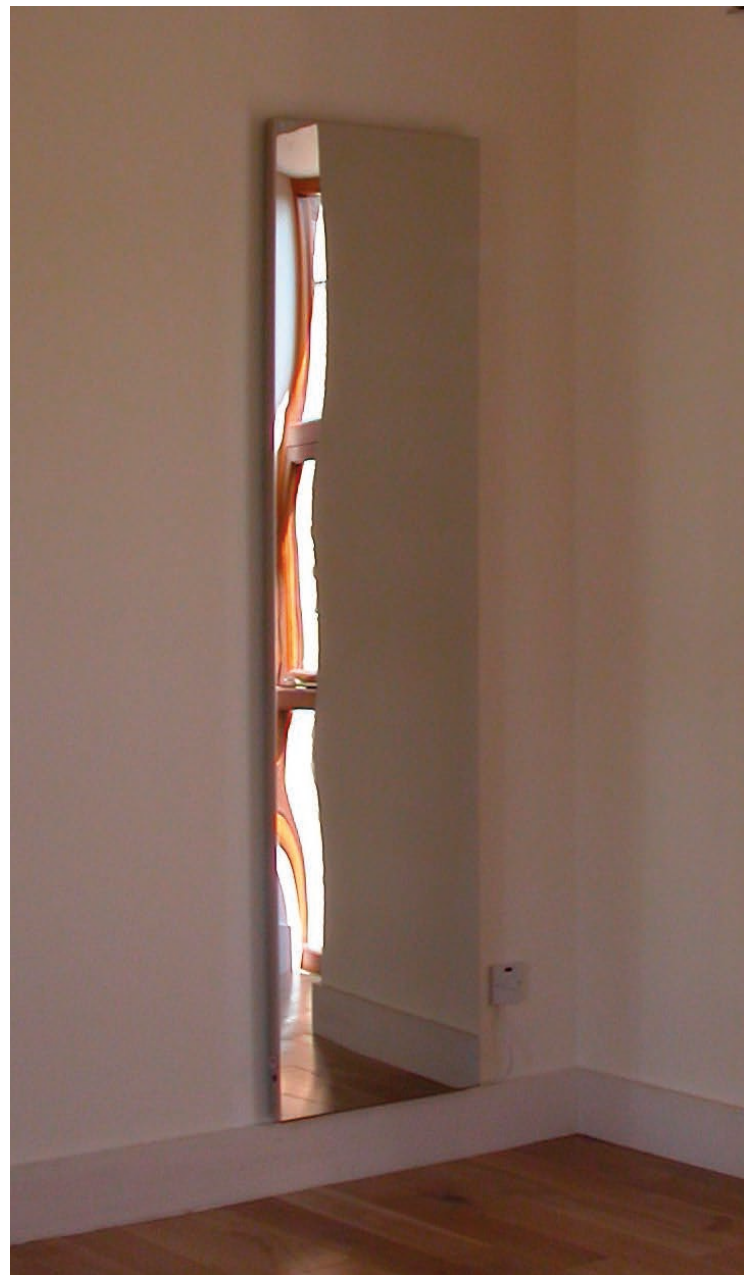

MIRROR FINISH BRUSHED STAINLESS STEEL



**A simple to install wireless controlled heating system for the whole home and commercial applications. Perfect for apartments, public areas, offices, showrooms, shops, nurseries, schools, retirement homes and healthcare!**


## RADIATOR (RECEIVER) KEY FEATURES:

Simply wire the heater to a fuse spur / Hidden wiring / No need to manually switch heaters "on" or "off"

## WIRELESS CONTROLLER (TRANSMITTER) KEY FEATURES:

Keylock mode / Simple to Programme / Up to 6 temperature settings per day / 7 day clock / Advance mode / Economy mode / Holiday mode / Boost Mode / Inbuilt room temperature sensor / Frost protection / Powered by 2 x 1.5v Alkaline batteries


The TX control unit sends a 433MHz radio signal to each "registered" heater within a radius of 30 metres. Each RX panel heater has an inbuilt receiver designed to respond to a signal from the WCT 100/RX.

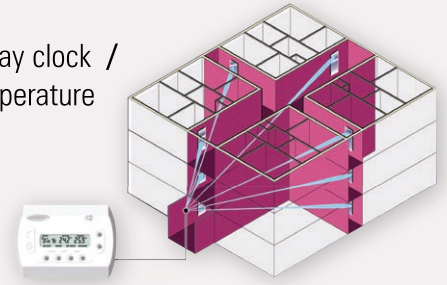

## SPECIFICATION:

LINE REF	CODE	DIMENSIONS (W X H X D)	ELEMENT (WATTS)	OUTPUT (WATTS)	OUTPUT (BTU'S)
<b>Brushed Stainless Steel</b>					
19.1	ECO 1000DLL/RP/SS/RX	500 x 2000 x 40	1000	980	3343
19.2	ECO 1000DL/RP/SS/RX	500 x 1500 x 40	1000	735	2507
19.3	ECO 500DLL/RP/SS/RX	500 x 1000 x 40	500	490	1671
<b>Mirror Finish</b>					
19.4	ECO 1000DLL/RP/MF/RX	500 x 2000 x 40	1000	680	2194
19.5	ECO 1000DL/RP/MF/RX	500 x 1500 x 40	1000	500	1706
19.6	ECO 500DLL/RP/MF/RX	500 x 1000 x 40	500	336	1146

## TEMPERATURE RANGE: STANDARD 70°C

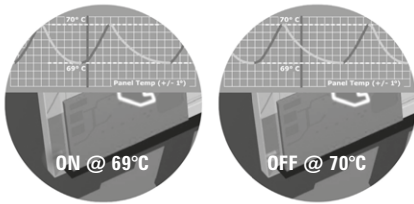

## Battery Kit WCT100, WCT500

## CONTROLLERS


## MK1 230V Mains Kit

### NEW FEATURES!

SURFACE TEMPERATURE SETTING:



WCT 500/TX/70



Press the two buttons as shown until current surface temperature is displayed. Then adjust to required temperature using the arrow buttons.



Sharrocks Street, Wolverhampton WV1 3RP

Tel: 01902 457575 Fax: 01902 457797 Email: [sales@ecolec.co.uk](mailto:sales@ecolec.co.uk) Website: [www.ecolec.co.uk](http://www.ecolec.co.uk)



Hereby, Ecolec Limited, declares that the radio equipment type thermostat and gateway are in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address: [www.ecolec.co.uk/support](http://www.ecolec.co.uk/support)

© Ecolec © Ecolec 1995-2018. All rights reserved  
Ecolec is a registered trademark of Ecolec Limited  
All specifications subject to change without notice



Product of the EU.



Proudly Manufactured in the UK.